

Steam Injector

TYPE BI

Description

The steam injectors type BI ensure steam injection in water with a very low level of noise and vibration. The steam injectors type BI offer a quick and efficient heating with good mixing quality. Heating a feed water tank with steam injectors type BI is simple and can considerably reduce the level of oxygen to prevent corrosion.

Features

Designed : PN25 ,completely 316L
Minimum Differential Pressure: 0,5 bar
Horizontal mounting.



Type	PMA (bar)	DN	Installation	Kv
BI 15	17	½" GAZ	H	0,8
BI 25	17	1" GAZ	H	4,2
BI 40	17	1" ½ GAZ	H	9,6


How to order

Steam injector type BI25


Dimensions

Type	A	Ø B
------	---	-----

BI 15

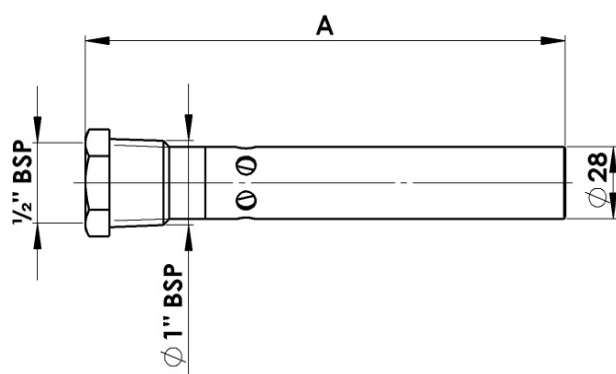


BI 25/BI 40



Sart von Rohr SAS
25 Rue de la Chapelle
BP 2 – F 68620 Bitschwiller-lès-Thann

Tel. 33/ (0)3 89 37 79 50
Fax 33/ (0)3 89 37 79 51
E-mail : sartventes@sart-von-rohr.fr

CAPACITY

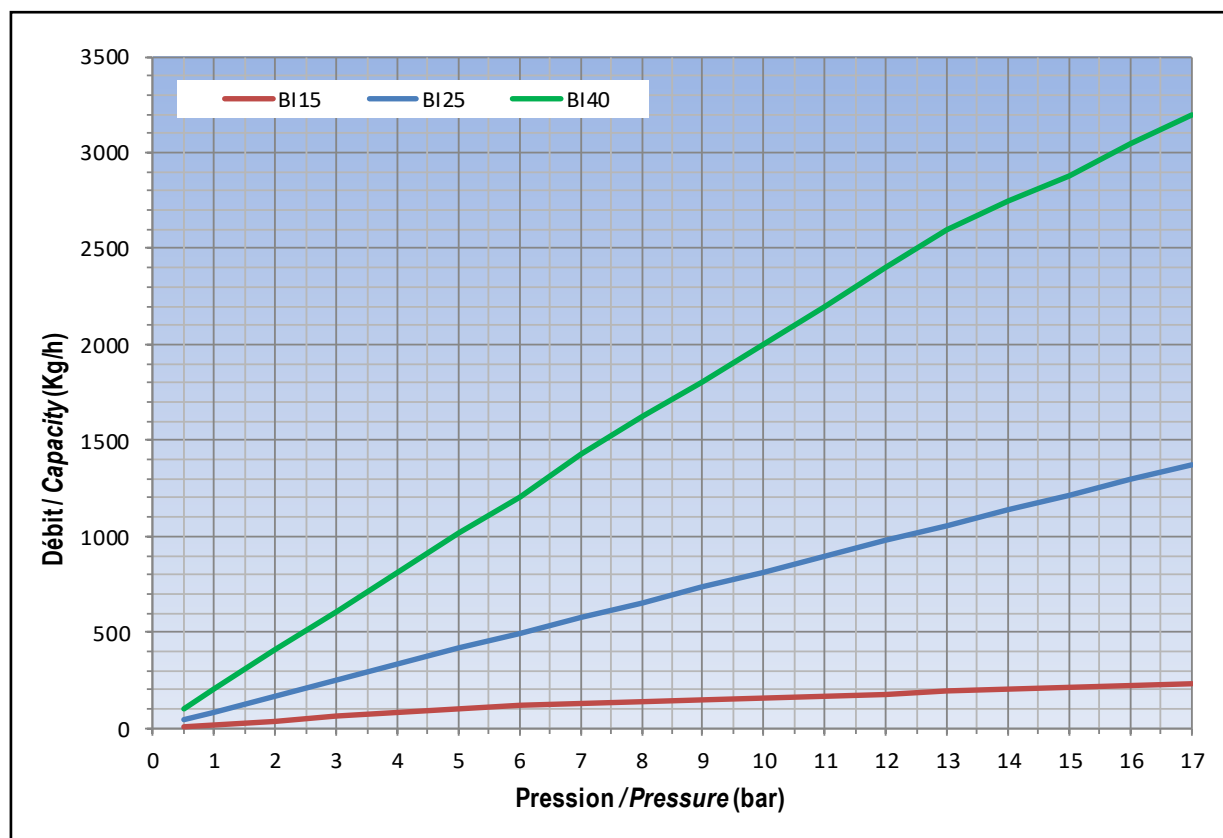

Typical installation

